




CONFORME ITED 3

Cabo RG6 3 GHz UC-300 Bobine - 100 mts

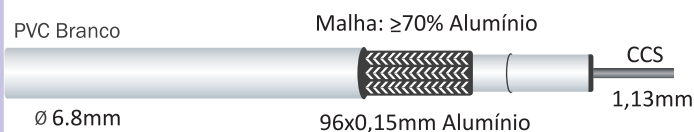

CONDUCTOR	Mat.	CCS
	Ø mm	1,13
DIELECTRICO	Mat.	PE
	Ø mm	FISICO 4,80
BLINDAGEM	Mat.	AL
MALHA		≥70% Alumínio
REVESTIMENTO	Mat.	PVC-Branco
	Ø mm	6,80
IMPEDÂNCIA	Ω	75
RESISTÊNCIA OHMICA	Ω	≤12/100mts

Atenuação	
MHz	dB/100mts
50	4,70
200	8,90
470	13,50
800	18,80
1000	20,50
1750	28,00
2150	31,00
2400	33,50
3000	37,30